

Surface Mount Rectifiers

P80JC--P80KC

Features

- Planar passivated chips
- Ultra low leakage reverse current
- High temperature performance
- High surge current capability
- RoHS Compliant



Mechanical Data

- Case: SMC molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

| Characteristic | Symbol | P80JC | P80KC | Units |
|--|--|-------|-------|-------|
| Peak repetitive reverse voltage | V _{RRM} | 600 | 800 | V |
| RMS reverse voltage | V _{RMS} | 420 | 560 | V |
| DC blocking voltage | V _{DC} | 600 | 800 | V |
| Maximum average forward output current | I _{F(AV)} | 8.0 | | A |
| Peak forward surge current, 8.3ms single half-sine-wave | @T _J = 25°C I _{FSM} | 200 | | A |

Thermal Characteristics

| Parameter | Symbol | P80JC | P80KC | Units |
|--|------------------|-----------------|-------|-------|
| Typical thermal resistance (Note 1) | R _{θJA} | 55 | | °C /W |
| | R _{θJC} | 15 | | |
| | R _{θJL} | 10 | | |
| Operating junction temperature range | T _J | - 55 ---- + 150 | | °C |
| Storage temperature range | T _{STG} | - 55 ---- + 150 | | °C |

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Surface Mount Rectifiers

P80JC--P80KC

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

| Parameter | Symbol | Test conditions | Typ. | Max. | Units | |
|---------------------------------------|----------------|----------------------|------------------------|------|-------|----|
| Maximum instantaneous forward voltage | V _F | I _F =8.0A | 0.95 | 1.0 | V | |
| Maximum Reverse current | I _R | Rated V _R | @T _A =25°C | 0.2 | 1.0 | μA |
| | | | @T _A =150°C | 40 | 100 | |

Surface Mount Rectifiers

P80JC--P80KC

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

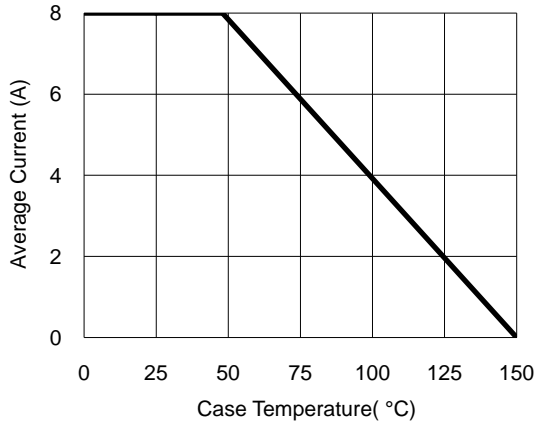


Fig.2- Surge Current Derating Curve

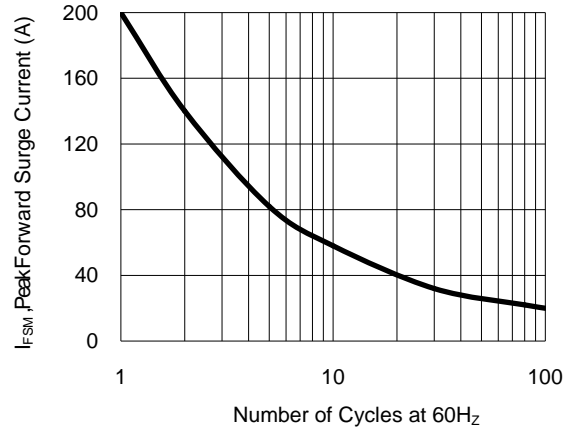


Fig.3- Typical Forward Voltage Characteristic


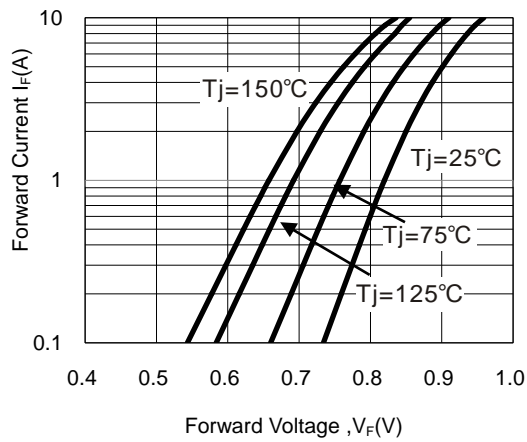



Fig.4- Typical Reverse Characteristic

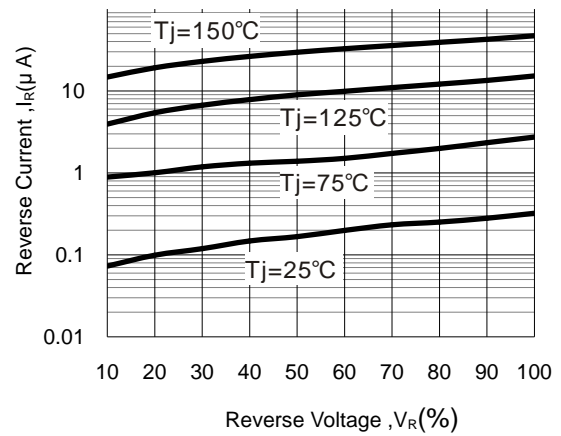


Surface Mount Rectifiers

P80JC--P80KC

Package Outline Dimensions(unit:mm)

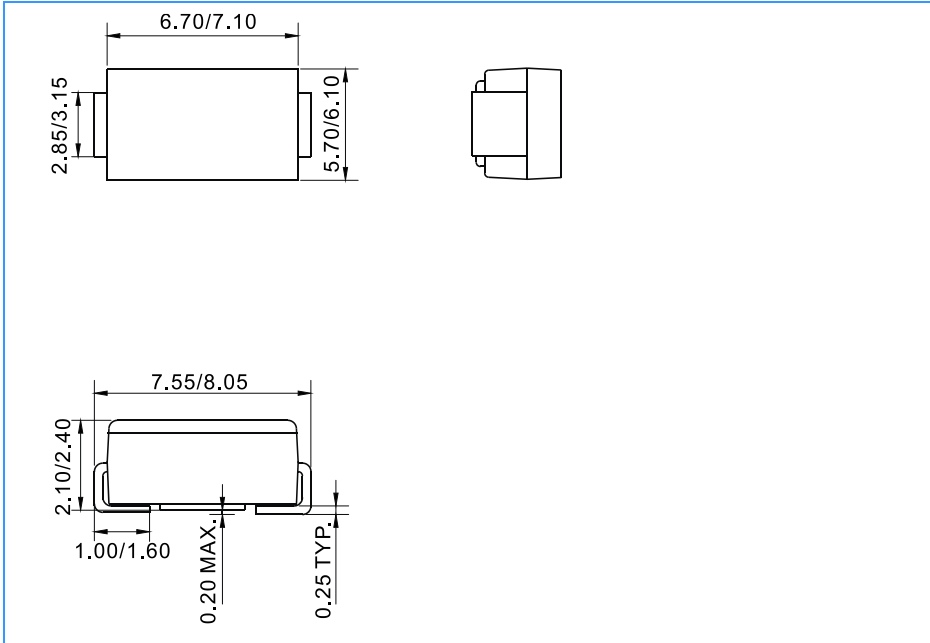

Mounting Pad Layout(unit:mm)

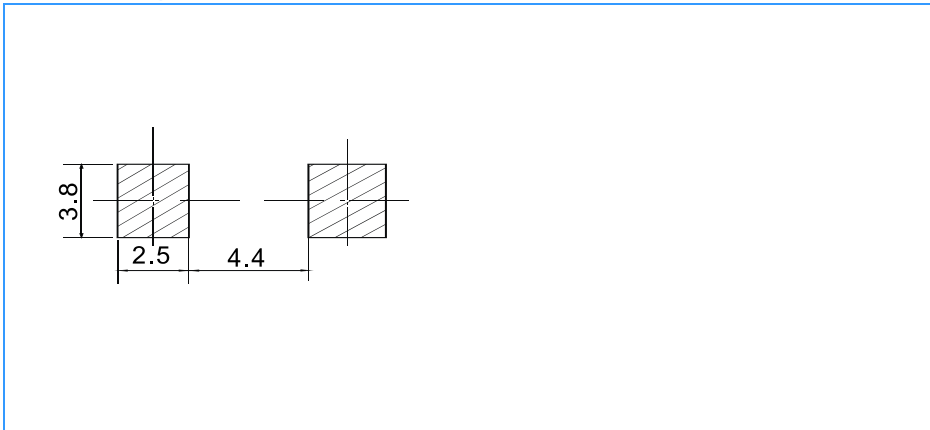

Ordering Information

| Part No. | Marking | Package | Shipping |
|----------|---------|---------|-----------------|
| P80JC | P80JC | SMC | 3000 /Tape&Reel |
| P80KC | P80KC | SMC | 3000 /Tape&Reel |