

GLASS PASSIVATED RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 6.0 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ Glass passivated junction
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC R-6, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.072 ounces, 2.04 grams
- ◇ Mounting position: Any

R - 6

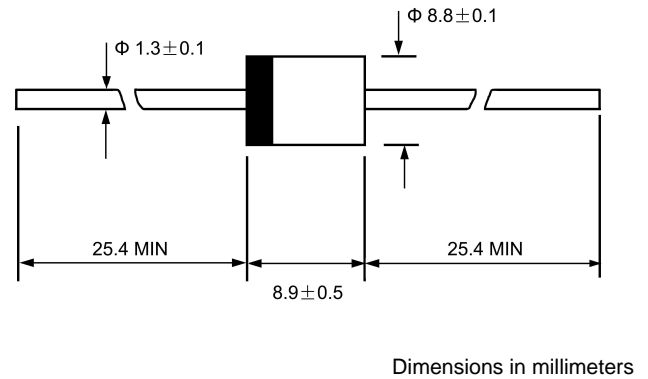

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		6A05G	6A1G	6A2G	6A4G	6A6G	6A8G	6A10G	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	6.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	250.0							A
Maximum instantaneous forward voltage @ 6.0 A	V_F	1.0							V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	10.0 100.0							μA
Typical junction capacitance (Note1)	C_J	120							pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	10							$^\circ C/W$
Operating junction temperature range	T_J	- 55 ---- + 150							$^\circ C$
Storage temperature range	T_{STG}	- 55 ---- + 150							$^\circ C$


NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – FORWARD DERATING CURVE

AVERAGE FORWARD RECTIFIED CURRENT
AMPERES

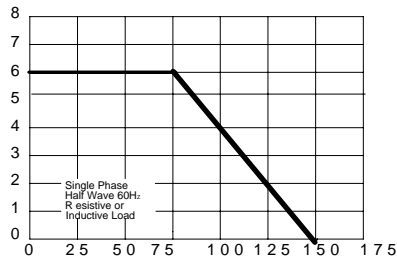


AMBIENT TEMPERATURE, °C

Single Phase
Half Wave 60Hz
Resistive or
Inductive Load

FIG.2 – TYPICAL FORWARD CHARACTERISTICS

INSTANTANEOUS FORWARD CURRENT
AMPERES

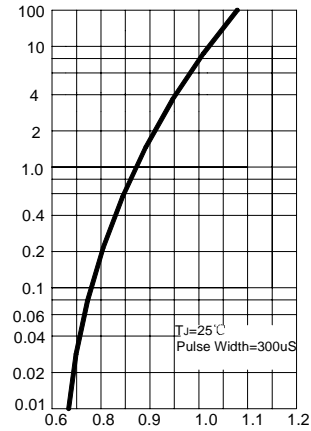


INSTANTANEOUS FORWARD VOLTAGE, VOLTS

T_J=25°C
Pulse Width=300uS

FIG.3 –MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

PEAK FORWARD SURGE CURRENT
AMPERES

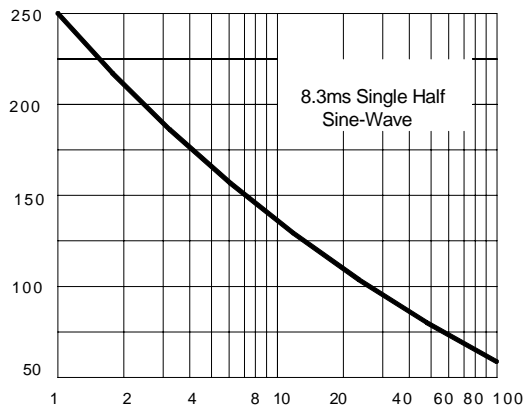


NUMBER OF CYCLES AT 60Hz

8.3ms Single Half
Sine-Wave

FIG.4 – TYPICAL JUNCTION CAPACITANCE

CAPACITANCE, pF

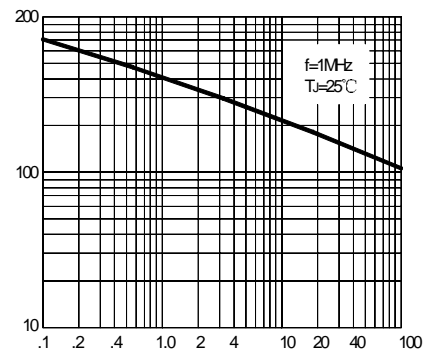

REVERSE VOLTAGE, VOLTS

f=1MHz
T_J=25°C